


INSTALLATION INSTRUCTIONS
READ THE INSTRUCTIONS
4 LIGHT CHANDELIER



Questions, problems, or missing parts? Before returning to the store, call Decor Living Customer Service 9:00 a.m. - 5:00 p.m., EST, Monday-Friday **1-800-936-3213**

Distributed by:
Enchanté Lites LLC
New York, NY 10016

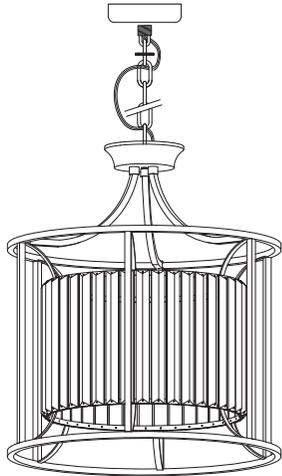

Warranty

LIMITED WARRANTY

Manufacturer warrants that the Products sold hereunder will be free from defects in material and workmanship for a period of one (1) year from the date of purchase. If the Products do not conform to this Limited Warranty during the warranty period (as herein above specified), Buyer shall notify Manufacturer in writing of the claimed defects and demonstrate to Manufacturer's satisfaction that said defects are covered by this Limited Warranty. If the defects and proof of purchase are properly reported to Manufacturer within the warranty period, and the defects are of such type and nature as to be covered by this warranty, Manufacturer shall, at its own expense, furnish replacement Products or, at Manufacturer's option, replacement parts for the defective Products. Shipping and installation of the replacement Products or replacement parts shall be at Buyer's expense.

EXCLUSIVE OBLIGATION

THIS WARRANTY IS EXCLUSIVE. The sole and exclusive obligation of Manufacturer shall be to repair or replace the defective Products in the manner and for the period provided above. Manufacturer shall not have any other obligation with respect to the Products or any part thereof, whether based on contract, tort, strict liability or otherwise. Under no circumstances, whether based on this Limited Warranty or otherwise, shall Manufacturer be liable for incidental, special, or consequential damages.



OTHER STATEMENTS

Manufacturer's employees or representatives' ORAL OR OTHER WRITTEN STATEMENTS DO NOT CONSTITUTE WARRANTIES, shall not be relied upon by Buyer, and are not a part of the contract for sale or this limited warranty.

ENTIRE OBLIGATION

This Limited Warranty states the entire obligation of Manufacturer with respect to the Products. If any part of this Limited Warranty is determined to be void or illegal, the remainder shall remain in full force and effect.

Required Tools



Included Hardware



Package Contents

- A - Mounting Bracket
- B - Canopy
- C - Collar Loop
- D - Threaded Ring
- E - Chain
- F - Fixture Loop
- G - Fixture
- H - Lamp Holder
- I - 60W E12 Bulb (x4) (Not Included)

Installation

WARNING: Turn off the electricity at the main fuse box (or circuit breaker box) before beginning installation by switching the circuit breaker off or removing the fuse.

WARNING: If cord is damaged, socket must be replaced by a qualified electrician or trained professional.

WARNING: Min 90°C (194°F) supply conductors.

CAUTION: Consult a qualified electrician to ensure correct branch circuit conductor.

NOTE: Some parts may be pre-attached and may need to be removed before installation.

Installing the bracket

Screw center screw (DD) halfway into center hole of mounting bracket (A) and lock into place with center screw nut (CC).

Fasten the mounting bracket (A) onto the outlet box using the outlet box screws (AA).

Ensure all supply circuit wires protrude out of the outlet box.

Adjusting the chain length (optional)

If shorter chain is desired, adjust the chain (E) to the desired length by taking out chain links with pliers.

Attach the fixture loop (F) to the fixture (G).

Carefully feed fixture electric cord and ground wire up through chain (E), weaving it through every third link.

NOTE: If the cord is too long, then cut the excess cord. Make sure to leave at least 6-in for wiring.

Making the electrical connections

NOTE: If the supply circuit does not have a ground wire, attach the fixture ground wire to the green screw (EE). Never connect the ground wire to the black or the white power supply wires.

Strip 3/4 in. of insulation from the wire ends of the fixture and from the supply circuit wires.

Attach the supply circuit ground wire (green or bare copper wire) to the fixture ground wire and secure the connection with a wire nut (BB).

Twist the stripped wire ends of the fixture and the supply circuit wires together: black to black (L), and white to white (N).

Twist on the wire nuts (BB), ensuring the wires are no longer exposed.

Carefully tuck the connected wires and the wire nuts (BB) into the outlet box.

Installing the canopy

Screw the collar loop (C) onto the center screw (CC) on the mounting bracket (A) and tighten.

Slide the canopy (B) up to cover the outlet box and secure into place by screwing the threaded ring (D) up onto the collar loop (C).

Installing the bulbs

Install the light bulb (I). Only use a bulb of the specified type and maximum rated wattage or less.

This fixture uses four 60 Watt (max.) E12 bulbs (not included).

